

iDP-3550/3551

CITIZEN®




FEATURES

Small size, light weight, and low price
High-speed print (Bi-directional)
Red and black print
Auto load
Paper end sensor
Built in auto cutter (ACS-134) (iDP-3551)
Built in power supply

OPTIONS

Special purpose winder AW-3-E (Option)
that will be placed Separately.

OUTLINE DRAWING OF IDP 3550



Item/Model	iDP-3550RF/PF	iDP-3551RF/PF
Print method	Serial dot impact method (Bidirectional print), 2-pass graphic (Unidirectional print)	
Print width	Character type: 63.6 mm/Graphic type: 58.7mm	
Print head	9 pins	
Print speed	Character type: Approx. 3.6 lines/second/Graphic type: Approx. 3 lines/second	
Print columns	40 Columns	
Character size	Character type: 1.36 mm(W) X2.4 mm(H) (7 dots) 1.36 mm(W) X3.1 mm(H) (9 dots) Graphic type: 1.20 mm(W) X2.4 mm(H) (7 dots) 1.20 mm(W) X3.1 mm(H) (9 dots)	
Line spacing	Character type: 4.23 mm (1/6 inch) Graphic type: 2.82mm (1/9 inch)	
Paper	Ordinary paper and non-carbon paper: 76+/-0.5 mm(W) x ø83 mm(OD)	
Ink ribbon	Special purpose ribbon cartridge: Red/Black or Single Color (Black or Purple)	
Interface	Serial(RS-232C), Parallel(CENTRONICS compliant)	
Command system	CBM mode, STAR mode, ESC/POS mode The user can select the mode with the DIP switch and preset jumpers.	
Input buffer	6KB or 256 bytes (Selectable with the DIP switch)	
Drawer function	2-drawer, 1-drawer switch	
Auto loading function	Automatically feeds the paper by several lines when it is inserted.	
Paper end detection	Stops printing when the paper has run out.	
Paper near end detection	Stops printing when the paper is running out. (Settable with a command)	
Auto cutter	None	AC-134-E (Capable of partial and full cut)
Weight	Approx. 2.8 kg Approx. 3 kg	
Outer dimensions	160(W)x212(D)X194(H)mm 160(W)x212(D)X173(H)mm	
Operating temperature and Humidity	0 to 40°C, 35 to 85 %RH (No dew condensation)	
Storage temperature and Humidity	-20 to 60°C, 10 to 90 %RH (No dew condensation)	

MODEL CLASSIFICATIONS

iDP-3550 R F 120 C

- TYPE C: Character Type (DP654-DFCS Printer Mechanism)
G: Graphic Type (DP657-DFGS Printer Mechanism)
- SUPPLY VOLTAGE 120: For 120 VAC 230: For 230 VAC
- CHARACTER SET F: International
- INTERFACE
 - CBM Mode
 - R: Serial (RS-232C)
 - P: Parallel (CENTRONICS Compliant)
 - STAR Mode
 - S: Serial (RS-232C)
 - C: Parallel (CENTRONICS Compliant)
 - ESC/POS Mode
 - T: Serial (RS-232C)
 - I: Parallel (CENTRONICS Compliant)
- MODEL NAME
 - iDP-3550 Standard Model
 - iDP-3551 With Auto Cutter

CITIZEN


RELIABILITY•VALUE•SUPPORT

CBM America Corporation
365 Van Ness Way, Suite 510
Torrance, CA 90501
310 781-1460
310 781-9152 Fax
800 421-6516
www.cbma.com

All trademarks and copyrights acknowledged.
All features and specifications are subject to
change without notice.
©1999 CBM America Corporation. Printed U.S.A.

CITIZEN®

iDP-3550/3551

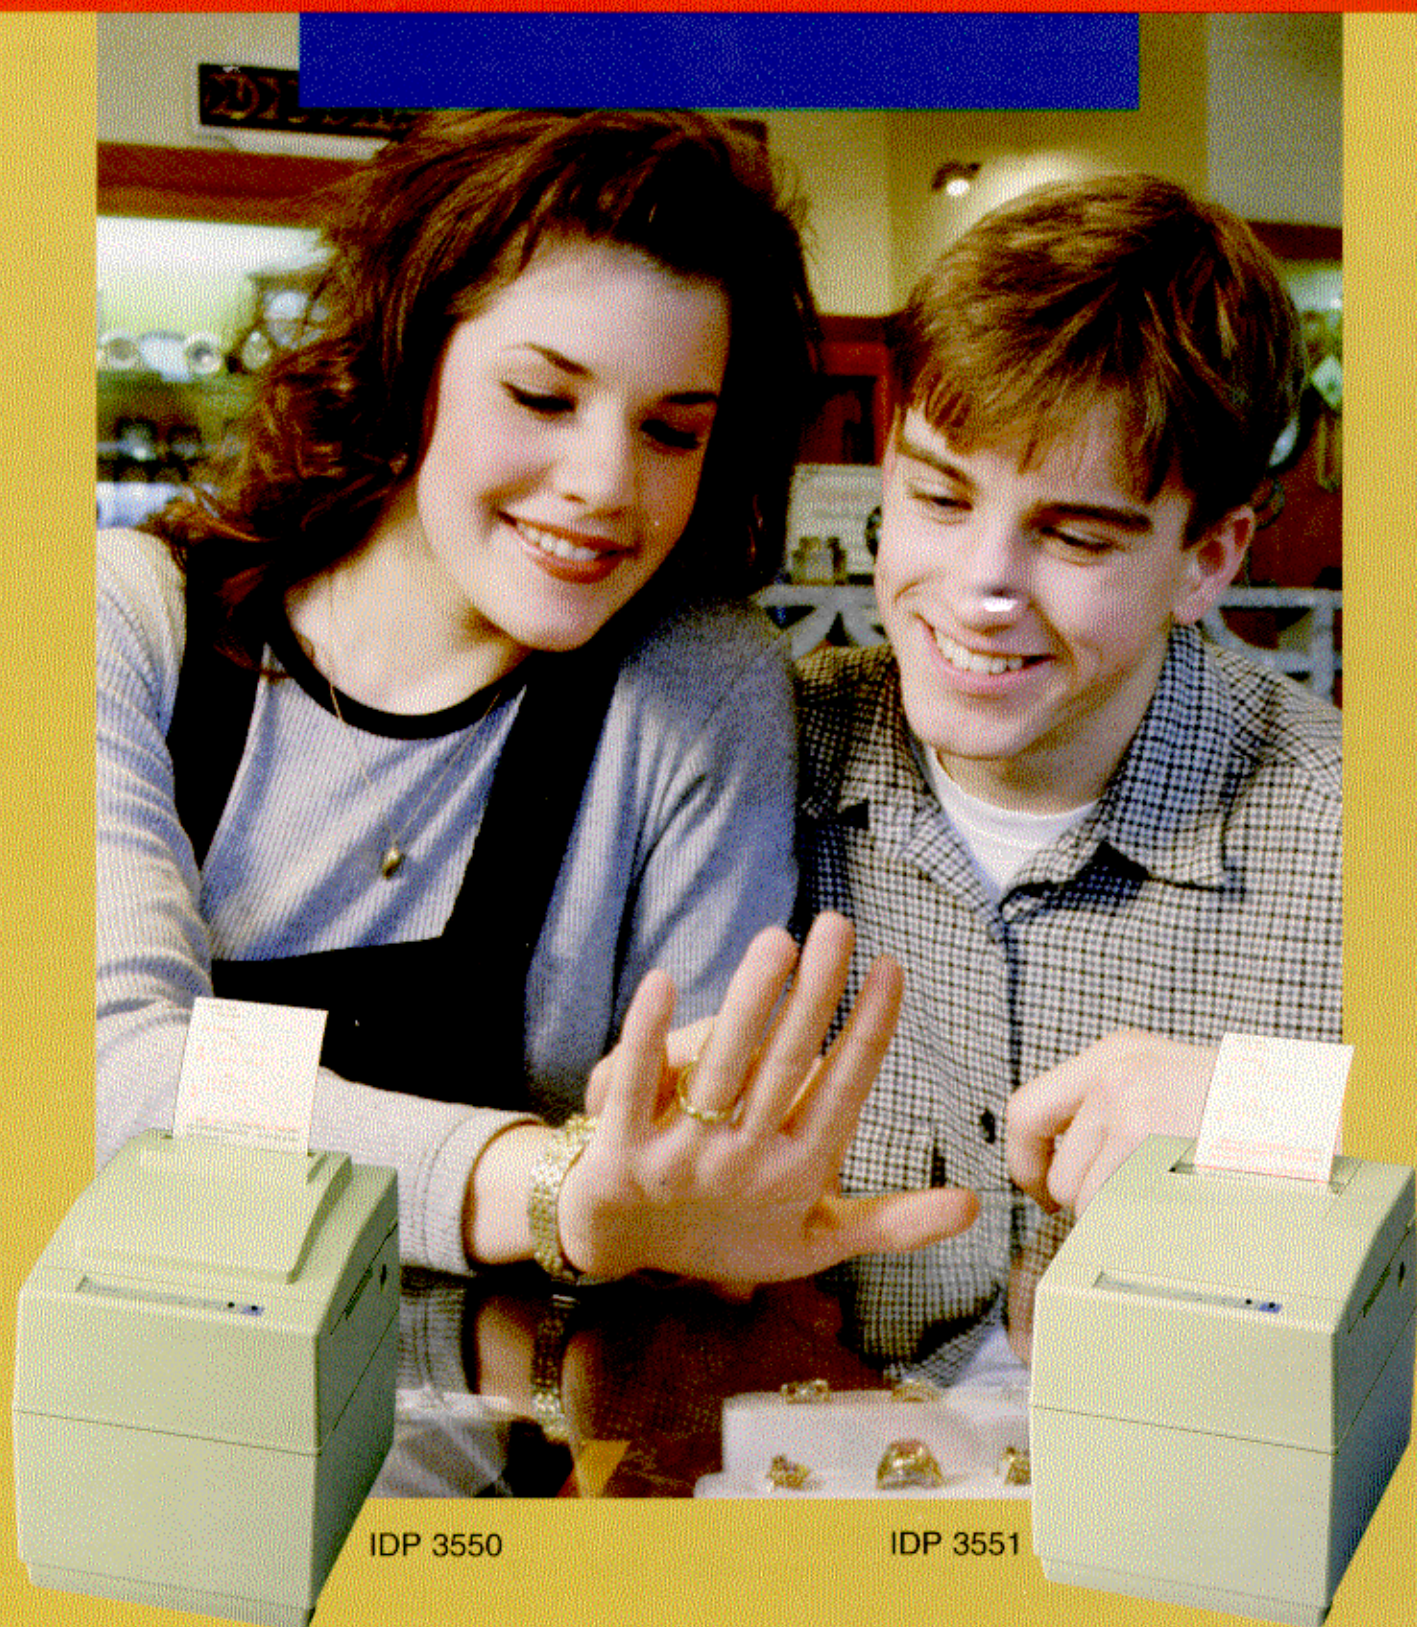

IDP 3550

IDP 3551



Phone: 1-800-351-9962
Fax: 1-312-212-1800
www.barcodesinc.com